



BB-29 CASING HEADS

Product Information


- Versatile Straight-Bore Design
- Accepts a Wide Variety of Casing Hangers
- BB-29-BP has 2 Additional Lockscrews for Bowl Protection
- BB-29-L Allows use of Lockscrews to Retain Hangers
- BB-29-L has a Slightly Deeper Bowl
- All Lockscrews Provided
- 45° Landing Shoulder
- 3 Different Types of Outlets
- Wide Range of Compatibility
- Multiple Bottom Connections
- Landing Bases Available

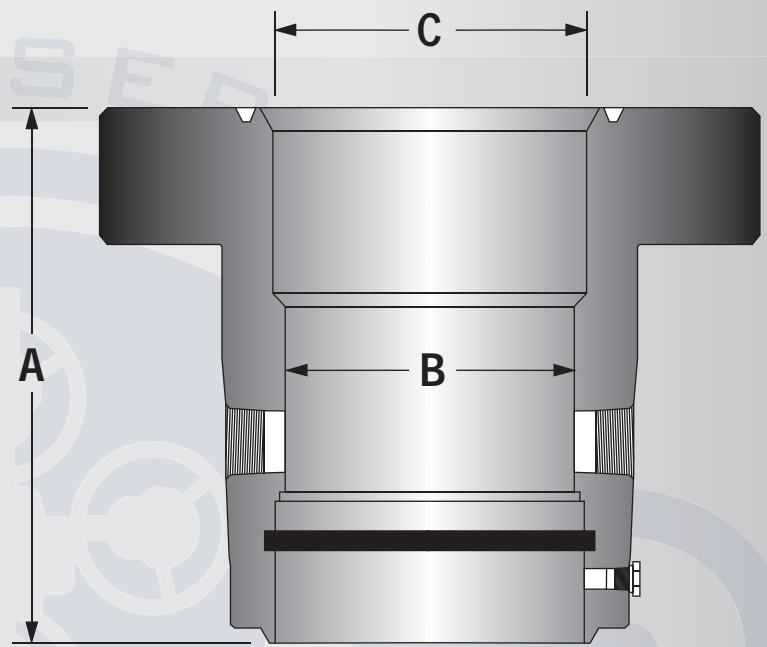


Casing Size	Top Flange	Female Threaded			Slip-On Weld			Slip-On Weld with O-Ring			Weight	
		A	B	C	A	B	C	A	B	C		
8-5/8"	11"	2,000	19.25"	8.00"	10.88"	19.25"	8.00"	10.88"	19.25"	8.00"	10.88"	
		3,000	19.25"	8.00"	10.88"	19.25"	8.00"	10.88"	19.25"	8.00"	10.88"	565 lbs
		5,000	19.25"	8.00"	10.88"	19.25"	8.00"	10.88"	19.25"	8.00"	10.88"	780 lbs
9-5/8"	11"	2,000	19.25"	9.00"	10.88"	19.25"	9.00"	10.88"	19.25"	9.00"	10.88"	
		3,000	19.25"	9.00"	10.88"	19.25"	9.00"	10.88"	19.25"	9.00"	10.88"	545 lbs
		5,000	19.25"	9.00"	10.88"	19.25"	9.00"	10.88"	19.25"	9.00"	10.88"	760 lbs
10-3/4"	11"	2,000	19.25"	10.00"	10.88"	19.25"	10.00"	10.88"	19.25"	10.00"	10.88"	
		3,000	19.25"	10.00"	10.88"	19.25"	10.00"	10.88"	19.25"	10.00"	10.88"	520 lbs
		5,000	19.25"	10.00"	10.88"	19.25"	10.00"	10.88"	19.25"	10.00"	10.88"	745 lbs
11-3/4"	13-5/8"	2,000	19.25"	11.00"	13.50"	19.25"	11.00"	13.50"	19.25"	11.00"	13.50"	
		3,000	19.25"	11.00"	13.50"	19.25"	11.00"	13.50"	19.25"	11.00"	13.50"	
		5,000	19.25"	11.00"	13.50"	19.25"	11.00"	13.50"	19.25"	11.00"	13.50"	
	16-3/4"	3,000	19.25"	11.00"	16.62"	19.25"	11.00"	16.62"	19.25"	11.00"	16.62"	
		5,000	20.00"	11.00"	16.62"	20.00"	11.00"	16.62"	20.00"	11.00"	16.62"	
		5,000	20.00"	11.00"	16.62"	20.00"	11.00"	16.62"	20.00"	11.00"	16.62"	
13-3/8"	13-5/8"	2,000	19.25"	12.56"	13.50"	19.25"	12.56"	13.50"	19.25"	12.56"	13.50"	
		3,000	19.25"	12.56"	13.50"	19.25"	12.56"	13.50"	19.25"	12.56"	13.50"	800 lbs
		5,000	19.25"	12.56"	13.50"	19.25"	12.56"	13.50"	19.25"	12.56"	13.50"	1500 lbs
	16-3/4"	3,000	19.25"	12.56"	16.62"	19.25"	12.56"	16.62"	19.25"	12.56"	16.62"	
		5,000	20.00"	12.56"	16.62"	20.00"	12.56"	16.62"	20.00"	12.56"	16.62"	
		5,000	20.00"	12.56"	16.62"	20.00"	12.56"	16.62"	20.00"	12.56"	16.62"	
16"	16-3/4"	2,000	19.25"	15.37"	16.62"	19.25"	15.37"	16.62"	19.25"	15.37"	16.62"	
		3,000	19.25"	15.37"	16.62"	19.25"	15.37"	16.62"	19.25"	15.37"	16.62"	1306 lbs
		5,000	20.00"	15.37"	16.62"	20.00"	15.37"	16.62"	20.00"	15.37"	16.62"	
20"	21-1/4"	2,000	24.00"	19.12"	20.12"	24.00"	19.12"	20.12"	24.00"	19.12"	20.12"	
	20-3/4"	3,000	24.00"	19.12"	20.12"	24.00"	19.12"	20.12"	24.00"	19.12"	20.12"	1772 lbs




BB-29




BB-29-BP



BB-29-L



BB-29 Bowl



BB-29-L Bowl




Slip-On Weld



Slip-On Weld w/O-Ring Seal



Threaded



Quick Lock