


# B-29 CASING HEADS

## Product Information

- Versatile Straight-Bore Design
- Accepts a Wide Variety of Casing Hangers
- B-29-BP has 2 Additional Lockscrews for Bowl Protection
- B-29-L Allows use of Lockscrews to Retain Hangers
- B-29-L has a Slightly Deeper Bowl
- All Lockscrews Provided
- 45° Landing Shoulder
- 3 Different Types of Outlets
- Wide Range of Compatibility
- Multiple Bottom Connections
- Landing Bases Available

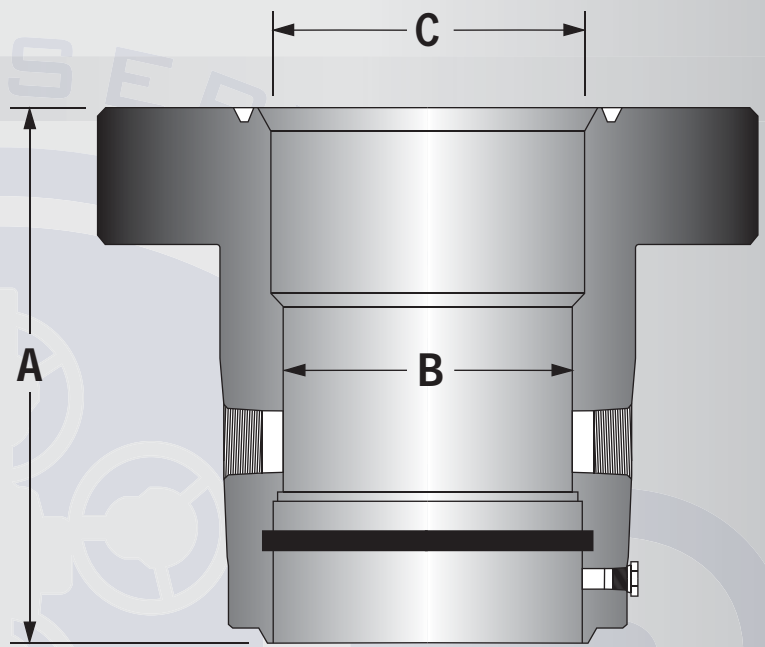

| Casing Size | Top Flange | Female Threaded |        |        | Slip-On Weld |        |        | Slip-On Weld with O-Ring |        |        | Weight |          |
|-------------|------------|-----------------|--------|--------|--------------|--------|--------|--------------------------|--------|--------|--------|----------|
|             |            | A               | B      | C      | A            | B      | C      | A                        | B      | C      |        |          |
| 8-5/8"      | 11"        | 2,000           | 19.25" | 8.00"  | 10.88"       | 19.25" | 8.00"  | 10.88"                   | 19.25" | 8.00"  | 10.88" |          |
|             |            | 3,000           | 19.25" | 8.00"  | 10.88"       | 19.25" | 8.00"  | 10.88"                   | 19.25" | 8.00"  | 10.88" | 565 lbs  |
|             |            | 5,000           | 19.25" | 8.00"  | 10.88"       | 19.25" | 8.00"  | 10.88"                   | 19.25" | 8.00"  | 10.88" | 780 lbs  |
| 9-5/8"      | 11"        | 2,000           | 19.25" | 9.00"  | 10.88"       | 19.25" | 9.00"  | 10.88"                   | 19.25" | 9.00"  | 10.88" |          |
|             |            | 3,000           | 19.25" | 9.00"  | 10.88"       | 19.25" | 9.00"  | 10.88"                   | 19.25" | 9.00"  | 10.88" | 545 lbs  |
|             |            | 5,000           | 19.25" | 9.00"  | 10.88"       | 19.25" | 9.00"  | 10.88"                   | 19.25" | 9.00"  | 10.88" | 760 lbs  |
| 10-3/4"     | 11"        | 2,000           | 19.25" | 10.00" | 10.88"       | 19.25" | 10.00" | 10.88"                   | 19.25" | 10.00" | 10.88" |          |
|             |            | 3,000           | 19.25" | 10.00" | 10.88"       | 19.25" | 10.00" | 10.88"                   | 19.25" | 10.00" | 10.88" | 520 lbs  |
|             |            | 5,000           | 19.25" | 10.00" | 10.88"       | 19.25" | 10.00" | 10.88"                   | 19.25" | 10.00" | 10.88" | 745 lbs  |
| 11-3/4"     | 13-5/8"    | 2,000           | 19.25" | 11.00" | 13.50"       | 19.25" | 11.00" | 13.50"                   | 19.25" | 11.00" | 13.50" |          |
|             |            | 3,000           | 19.25" | 11.00" | 13.50"       | 19.25" | 11.00" | 13.50"                   | 19.25" | 11.00" | 13.50" |          |
|             |            | 5,000           | 19.25" | 11.00" | 13.50"       | 19.25" | 11.00" | 13.50"                   | 19.25" | 11.00" | 13.50" |          |
|             | 16-3/4"    | 3,000           | 19.25" | 11.00" | 16.62"       | 19.25" | 11.00" | 16.62"                   | 19.25" | 11.00" | 16.62" |          |
|             |            | 5,000           | 20.00" | 11.00" | 16.62"       | 20.00" | 11.00" | 16.62"                   | 20.00" | 11.00" | 16.62" |          |
|             |            | 5,000           | 20.00" | 11.00" | 16.62"       | 20.00" | 11.00" | 16.62"                   | 20.00" | 11.00" | 16.62" |          |
| 13-3/8"     | 13-5/8"    | 2,000           | 19.25" | 12.56" | 13.50"       | 19.25" | 12.56" | 13.50"                   | 19.25" | 12.56" | 13.50" |          |
|             |            | 3,000           | 19.25" | 12.56" | 13.50"       | 19.25" | 12.56" | 13.50"                   | 19.25" | 12.56" | 13.50" | 800 lbs  |
|             |            | 5,000           | 19.25" | 12.56" | 13.50"       | 19.25" | 12.56" | 13.50"                   | 19.25" | 12.56" | 13.50" | 1500 lbs |
|             | 16-3/4"    | 3,000           | 19.25" | 12.56" | 16.62"       | 19.25" | 12.56" | 16.62"                   | 19.25" | 12.56" | 16.62" |          |
|             |            | 5,000           | 20.00" | 12.56" | 16.62"       | 20.00" | 12.56" | 16.62"                   | 20.00" | 12.56" | 16.62" |          |
|             |            | 5,000           | 20.00" | 12.56" | 16.62"       | 20.00" | 12.56" | 16.62"                   | 20.00" | 12.56" | 16.62" |          |
| 16"         | 16-3/4"    | 2,000           | 19.25" | 15.37" | 16.62"       | 19.25" | 15.37" | 16.62"                   | 19.25" | 15.37" | 16.62" |          |
|             |            | 3,000           | 19.25" | 15.37" | 16.62"       | 19.25" | 15.37" | 16.62"                   | 19.25" | 15.37" | 16.62" | 1306 lbs |
|             |            | 5,000           | 20.00" | 15.37" | 16.62"       | 20.00" | 15.37" | 16.62"                   | 20.00" | 15.37" | 16.62" |          |
| 20"         | 21-1/4"    | 2,000           | 24.00" | 19.12" | 20.12"       | 24.00" | 19.12" | 20.12"                   | 24.00" | 19.12" | 20.12" |          |
|             | 20-3/4"    | 3,000           | 24.00" | 19.12" | 20.12"       | 24.00" | 19.12" | 20.12"                   | 24.00" | 19.12" | 20.12" | 1772 lbs |

